

RX10 Receiver

10-Zone Programmable

features

- 10 zone LED and relay outputs
- Common relay output & sounder
- RS232 serial output
- Programmable via PC software
- Keyswitch reset facility



Versatile & Dependable

Introducing our most versatile receivers to date, the RX10 range is compatible with all our POCSAG transmitters and is completely programmable using PC based configuration software. The 10 zones each have an individual relay output which can be set for latching, momentary or change of state. Data can also be output by the RS232 serial port for logging etc.

RX10

10 zone programmable receiver


Specification

Power Input:	
RX10DC:	12V to 13.8V DC max @ 0.7A
RX10S DC:	12V to 13.8V DC max @ 2.0A
RX10S AC:	90-230V AC @ 0.5A
Signal format:	POCSAG FSK NRZ (Normal or Inverted)
Frequency:	
RX10DC:	Fixed Crystal
RX10S:	450-464 MHz synthesised
Channel spacing:	
RX10DC:	25kHz
RX10S:	12.5kHz & 25kHz
Frequency deviation:	+/-2.5kHz
Over air baud rate:	512,1200 or 2400bps
Relay contact:	Max. rating 0.5A @ 125V AC 1A @ 60V DC
Serial port:	RS232
Serial baud rate:	1200 to 115200
Footprint:	
RX10S: (H)* 328 x (W) 190 x (D) 78mm (*496 mm with 1/4 wave antenna)	
RX10DC: (H)* 185 x (W) 140 x (D) 42 mm (*335 mm with 1/4 wave antenna)	



Main features

- **Compatibility:** Can be used with all Scope POCSAG transmitters
- **10 Zones:** 10 individual zone relays + common activity relay and sounder
- **Versatile Zone Configuration:** Each zone individually switchable. All relays can be programmed for latching or momentary operation
- **Serial Port:** RS232 serial port for data logging or repeater functions
- **Fully Programmable:** All functions are programmable with PC based configuration software
- **Receiver Identity Codes:** Responds to transmitted RIC's (receiver identity codes) or ranges of RIC's
- **Global Reset:** By keyswitch or transmitted RIC
- **Supervised:** 'transmitter in service' facility
- **Signal Strength Meter:** RX10S versions only

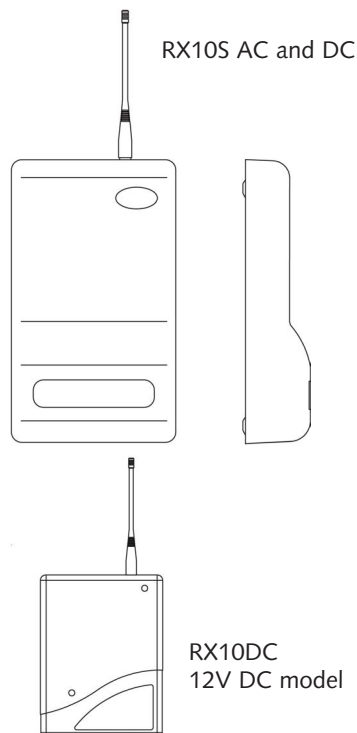

Typical Applications

- **Security & Fire**
- **Plant monitoring**
- **Access Control monitoring**
- **Remote Switching**



Scope Communications UK Ltd
Quantum House
Steamer Quay
Totnes, Devon, TQ9 5AL
England

Tel: +44 (0)1803 860700
Fax: +44 (0)1803 863716
Website: www.scope-uk.com
Email: sales@scope-uk.com